



MODEL 245

12-24V LED STOP & TAIL LAMP

Rubber bezel allows easy mounting on any flat surface.

The Model 245 Stop & Tail Lamp is approved for use in North American and in right-hand and left-hand drive countries. It is ideal for forestry, utility, recreation and construction on-highway vehicles. Dual compliance make extra part numbers a thing of the past.

The rubber bezel allows an easy mounting on any flat surface, and the LEDs provide years of trouble-free service. Can be mounted vertically or horizontally.

VEHICLE APPLICATIONS

- Construction
- Forestry
- Recreation
- Utility

FEATURES

- Acrylic Lens
- Mount vertically or horizontally to meet North American & European standards

MODEL NUMBER

Model 245




DESCRIPTION

12-24V LED Stop & Tail Lamp

PRODUCT SPECIFICATIONS

Light Source	LEDs (Light Emitting Diodes)
Input Voltage	8-28V DC
Current Draw – Stop	0.21 Amps at 12V; 0.12 Amps at 24V
Current Draw – Tail	0.02 Amps at 12V; 0.03 Amps at 24V
Lens	Acrylic
Mating Connector	.156 Bullet, AMP Shur Plug 60766-2
Standards	SAE J575 – Environmental SAE J586 – Stop SAE J585 – Tail ECE Reg. 7 – Stop & Rear Position (Tail)

Dimensions in inches (mm in parentheses) / Dimensions are for reference only.

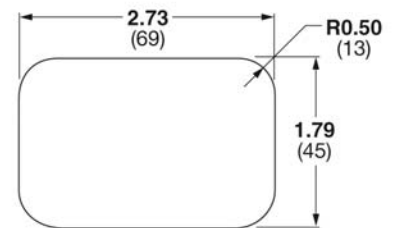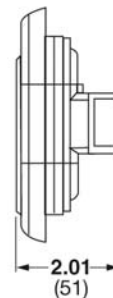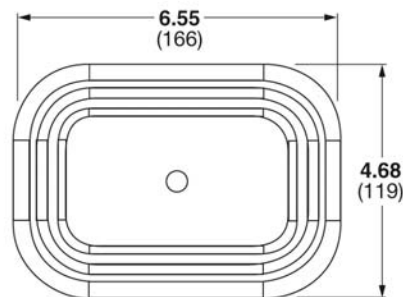

SUGGESTED PANEL CUT
(PANEL THICKNESS .06 - .22 IN.)