

PRODUCT SPECIFICATION SHEET

August 2005



MODEL 281

UL RECOGNIZED LED REAR COMBINATION LAMPS

Model Number

281-12V
281-24/36V
281-48V

Description

12V LED Rear Combination Lamp
24-36V LED Rear Combination Lamp
48V LED Rear Combination Lamp

Applications

- Construction
- Industrial
- Material Handling
- Utility

Features & Benefits


- Available in 12V, 24-36V or 48V configurations
- Rugged solid state LEDs can withstand shock & vibration
- Long-lasting LEDs mean never having to replace another bulb again!
- ECE compliant version (Model 283) also available
- 4-year limited warranty

Product Specifications

- Light Source: Light Emitting Diodes (LEDs)
- Input Voltage: 12V DC, 24-36V DC, or 48V DC
- Current Draw: 0.4 Amps
- Lens: Polycarbonate
- Housing: ABS
- Mounting: Flat/Panel Mount
- Wiring: 12" Bare Wire

Standards Compliance

- UL Recognized
- Sealed to IP67

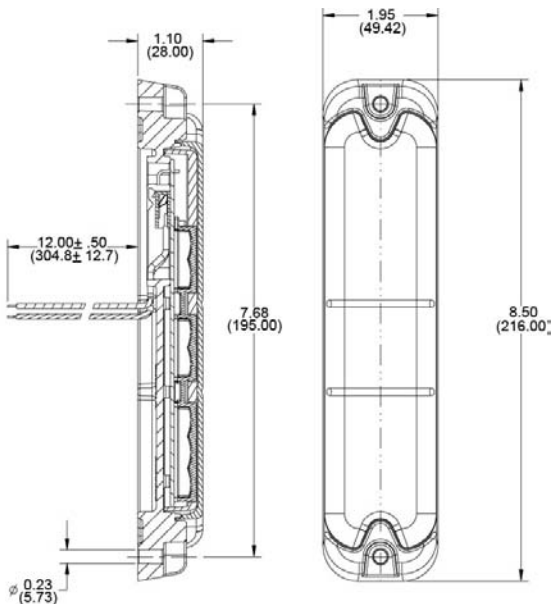

Dimensions in inches (mm in parentheses)
Dimensions are for reference only.

