


PRODUCT SPECIFICATION SHEET

April 2010

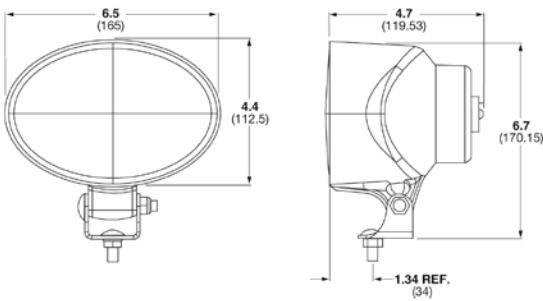

Dimensions in inches (mm in parentheses)
Dimensions are for reference only.

MODEL 7100

ECE-APPROVED HIGH-BEAM & LOW BEAM HALOGEN HEADLAMP

Model Number

7100/H4-12V ECE LHT
7100/H4-12V ECE RHT

Description

12V Halogen High & Low Beam Headlamp – ECE LH Traffic
12V Halogen High & Low Beam Headlamp – ECE RH Traffic

7100/H4-24V ECE RHT

24V Halogen High & Low Beam Headlamp – ECE RH Traffic

Applications

- Agriculture
- Forestry
- Recreational
- Construction
- Material Handling

Features & Benefits

- Available in 12V or 24V configurations
- 24V version is available in top or bottom mount; 12V versions are bottom mount only
- "Jeweled" reflector optics and H4 bulb provide years of trouble-free service!
- 1-year limited warranty

Product Specifications

- Light Source: Replaceable H4 Halogen Bulb with Sealing Boot
- Output: Raw: 1,000 Lumens; Effective: 340 Lumens (Low Beam)
Raw: 1,650 Lumens; Effective: 840 Lumens (High Beam)
- Input Voltage: 12V DC or 24V DC
- Current Draw: 4.58 Amps @ 12V; 3.13 Amps @ 24V (Low Beam)
5.00 Amps @ 12V; 2.92 Amps @ 24V (High Beam)
- Lens: Glass
- Housing: High Temperature Thermoplastic
- Mounting: Universal Mount; M8-1.25 x 20mm Mounting Bolt
- Mating Connector: Amp 172516-2 or equivalent

Standards Compliance

- ECE Reg. 112 (RH or LH Drive Headlamps)
- Buy America Compliant
- SAE J575 (Environmental)

