



MODEL 7125

LED STOP, TAIL & TURN LAMP

Stop, tail, turn lamp approved for use in North American and ECE countries.

The Model 7125 LED Stop, Tail & Turn lamp is approved for use in North America and in right-hand and left-hand drive countries. It is ideal for agriculture and construction on-highway vehicles, and dual compliance makes extra part numbers a thing of the past. The rubber bezel allows an easy mounting on any flat surface, and the LEDs provide years of trouble-free service.

VEHICLE APPLICATIONS

- Agriculture
- Construction
- Mining

FEATURES

- Bezel mounting in panels .250 to .315 inches thick
- Acrylic lens
- LEDs provide years of trouble-free service

MODEL NUMBER

Model 7125

DESCRIPTION

LED Stop, Tail, Turn Lamp

PRODUCT SPECIFICATIONS

Light Source

LEDs (Light Emitting Diodes)

Input Voltage

12-24V DC

Current Draw – Stop

0.23 Amps @ 12V; 0.125 Amps @ 24V

Current Draw – Tail

0.01 Amps @ 12V; 0.03 Amps @ 24V

Lens

Acrylic

Standards

ASAE 279.12 – Rear only

SAE J585 – Tail

SAE J586 – Stop

SAE J588 – Turn

SAE J2040 - Tail



SAE J2261 – Stop/Rear Turn

ECE Reg. 7 – Stop & Rear Position

Matting Connector

Packard 1211029

Dimensions in inches (mm in parentheses) / Dimensions are for reference only.

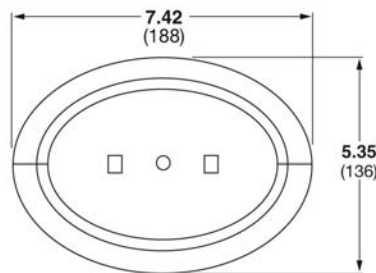

SUGGESTED PANEL CUT OUT
PANEL THICKNESS: .250 - .315 IN